




Specifications

| | |
|-----------------------------|---------------------------|
| Diameter: | 8" (200mm) |
| Sensitivity: | 87.1 dB |
| Power Handling: | 200 WRMS (400W Pk) |
| Frequency Response: | 10 ~ 400 Hz |
| Nominal Impedance: | 4 Ohms |
| Voice Coil Diameter: | 1.53" (39mm) |
| Peak Xmax: | 10mm |
| Magnet Weight: | 30 Oz |

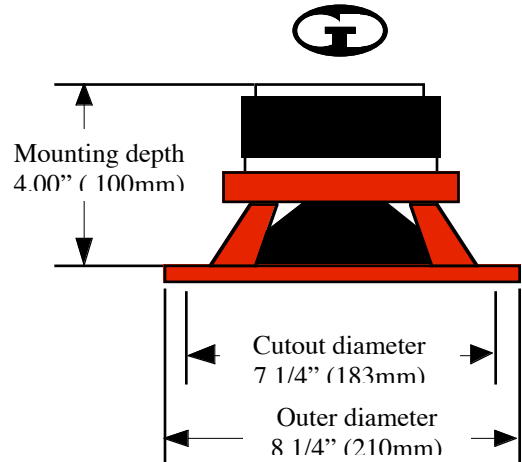

Thiele-Small Parameters

| | |
|---|----------------------------------|
| Free Air Resonance: | 48 Hz |
| Voice Coil DC Resistance: | 3.3 Ohms |
| Voice Coil Inductance @ 1 kHz: | 1.4 mH |
| Mechanical Q (Q_{ms}): | 7.2 |
| Electrical Q (Q_{es}): | 0.47 |
| Total Q (Q_{ts}): | 0.44 |
| Compliance Volume (V_{as}): | 14 l; 0.49 ft³ |
| Moving mass, Diaphragm: | 50 Gr |
| Motor Force Factor: | 10.4 Tm |

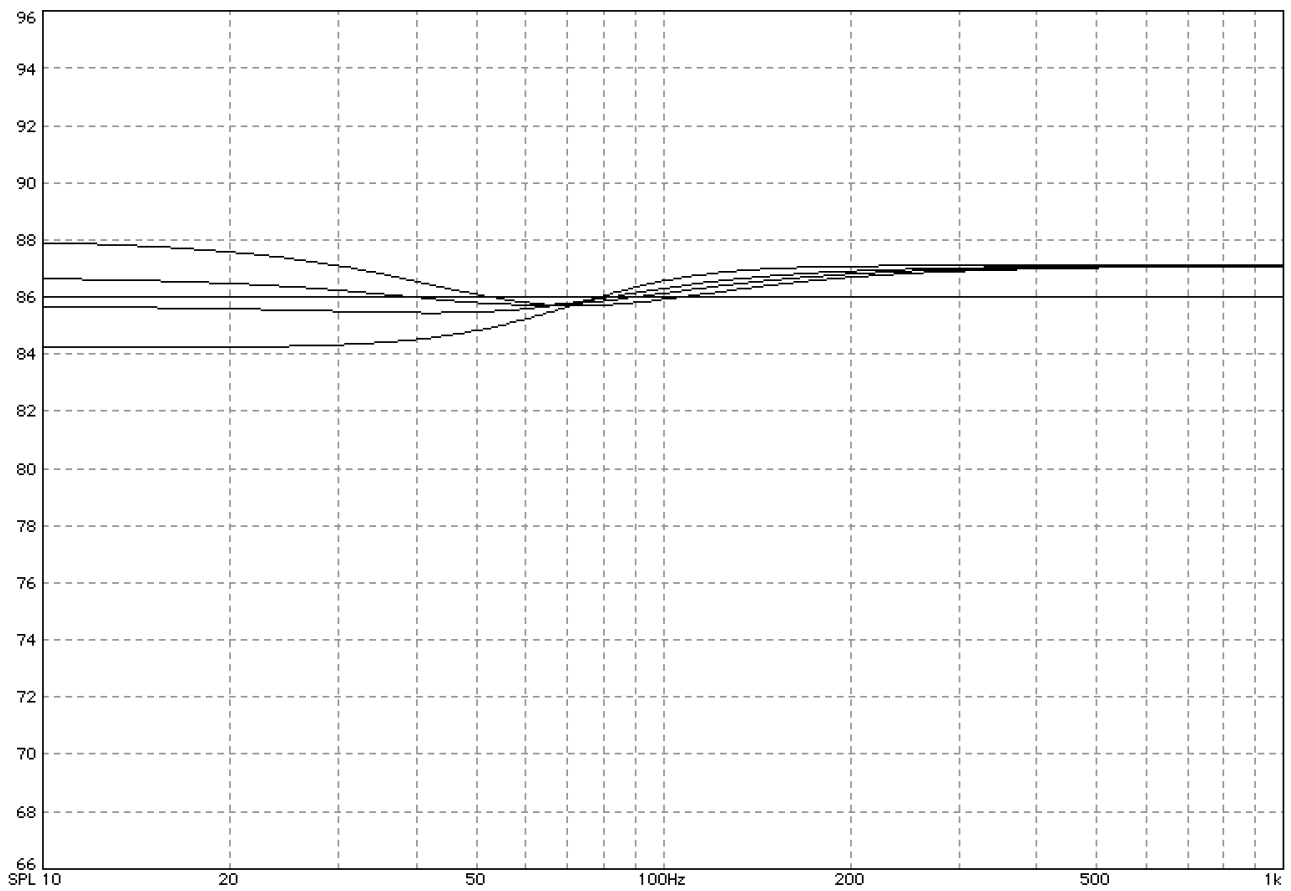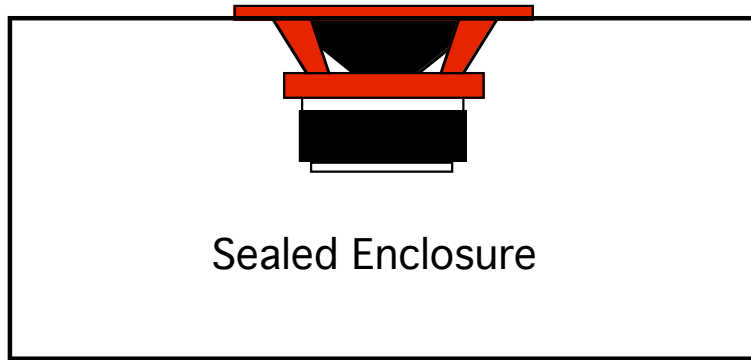

**Sealed Box Responses from top to bottom at 10Hz:
0.7, 0.5, 0.4, 0.3 cubic feet excluding driver displacement**